


**Important**

White nylon electrical isolators must be torqued up to 1.5NM to achieve maximum seal.

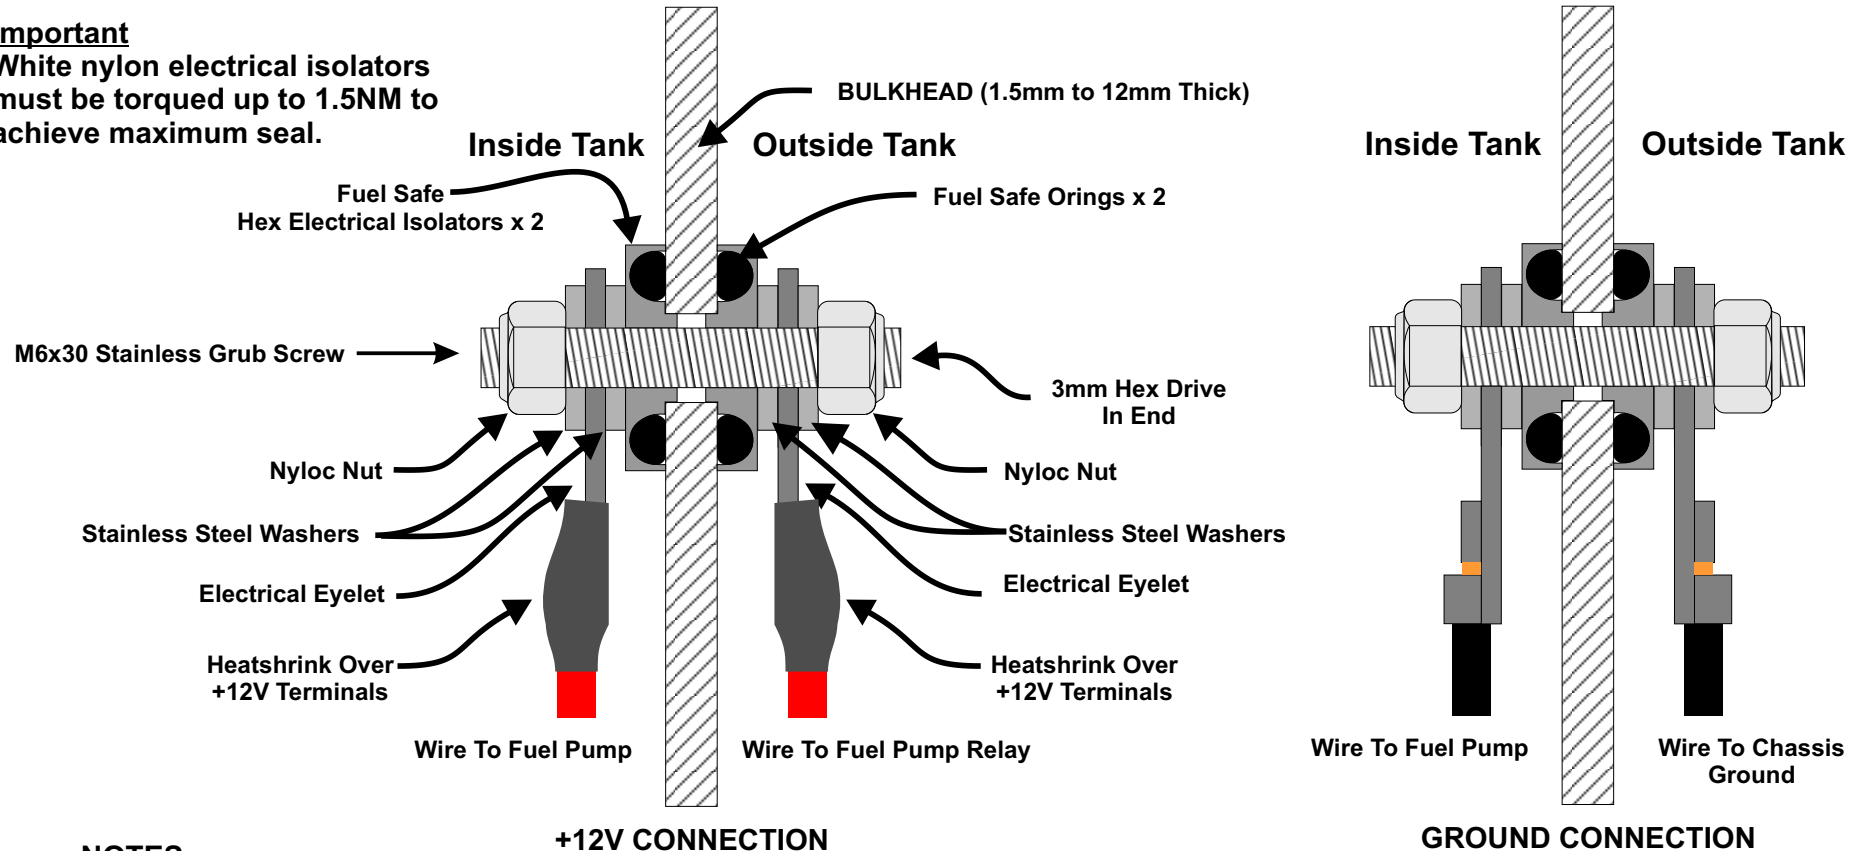

**NOTES:**

- The hole you drill in your fuel tank bulkhead must be between 8.1mm and 8.2mm in diameter.
- Bulkhead Fittings should seal once tightened, but Hylomar gasket dressing can be used if your tank will have pressure or vacuum.
- The minimum bulkhead thickness is 1.5mm. For use with thinner material, the spigots on the Electrical Isolators can be reduced to suit.
- You can use these Bulkhead Fittings for Fuel Level Sensors or other electrical controls.
- 14mm socket can be used on the electrical isolator.