

MAC Boost Control Valve Technical Diagram

Drawing Revision 1 - 29/10/2012



www.youtube.com/efihardware



www.facebook.com/efihardware



www.efihardware.com



info@efihardware.com




(03) 9873 5400
+613 9873 5400



(03) 9873 5955
+613 9873 5955

Recommended Fitment

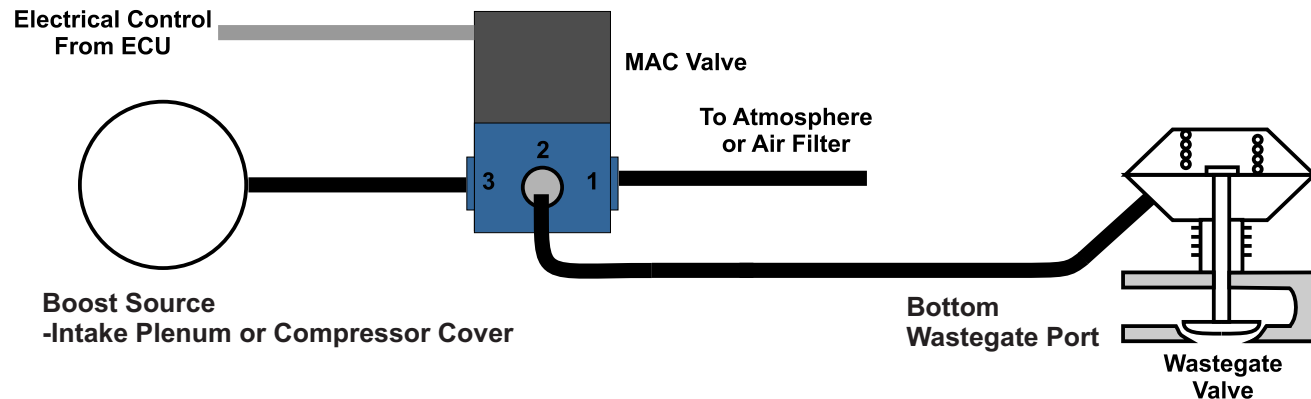

NOTES ON SINGLE PORT WASTEGATE:

The Boost Control (MAC) Valve bleeds off the pressure signal going to the Wastegate, thereby holding the Wastegate Valve on its seat under higher boost pressure conditions.

It is recommended that you set the ECU Boost Control frequency to 5Hz - 20Hz.

EFI Hardware Mobile Apps



www.efihardware.com/apps.php