

Product Update

FI114962 61 lb/hr Deka IV Short Minitimer



Features


Fuel Compatibility	Standard Gasolines & Ethanol Flex Fuels
Fuel Pressure	300 kPa
Static Flow Rate	n-Heptane: 7.64 g/sec (61 lb/hr, 668 cc)
Dynamic Flow Rate	n-Heptane: mg/pulse (15.7 mg/pulse 2.5 ms PW, 20 ms Period)
Offset	0.67 ms
Minimum Linear PW	1.5 ms
Linear Flow Range (SAE)	8.43
Opening/Closing Time	1.3 ms / 0.7 ms
Coil Resistance	12.0 •
Injector Inductance	11.6 mH
SMOV/DMOV	4.86 V / 5.28 V
Connector	Minitimer
Spray Pattern	26° Cone
Installation Compatibility	Deka V Short & VII Short Installation Compatible
Identification Shell Color	Blue

Connector







Minitimer

Basic Dimensions

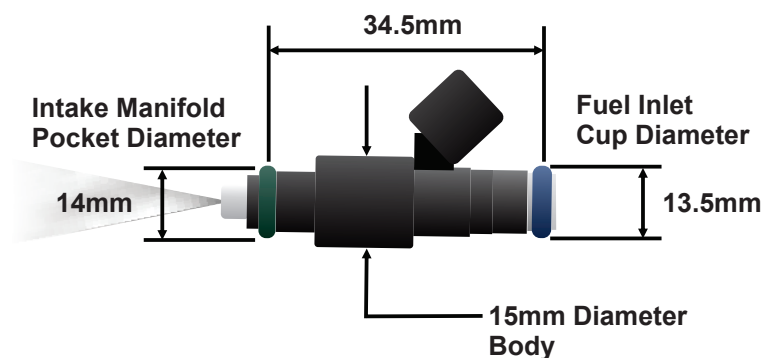


EFI Hardware Part Number: 855-646HS

Spray Characteristics (4 Hole Orifice)

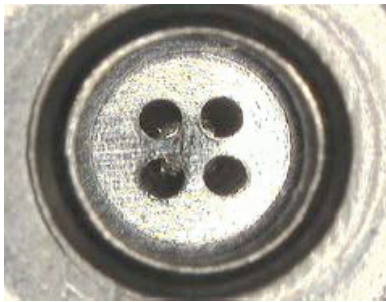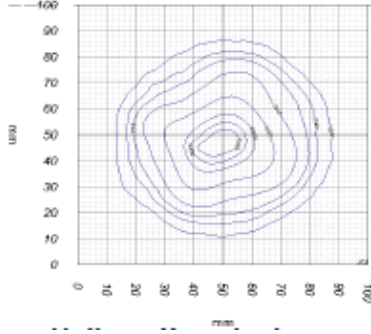

Voltage Sensitivity

Voltage Sensitivity Summary, 6-16V

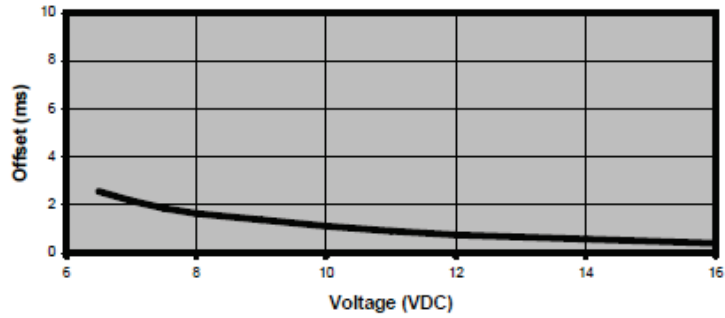

Linearity

Characteristic Injector Flow Curve

